


C26800 CuZn33 brass strip

Brass factory, more than 10 years manufacture experience, attained ISO9001, work on OEM and ODM projects..

1. Introduction of the C26800 CuZn33 brass strip

H68 / C26800 / CuZn33 As a kind of most widely used brass. has very good plasticity and high strength, good machinability, easy welding and good corrosion resistance.

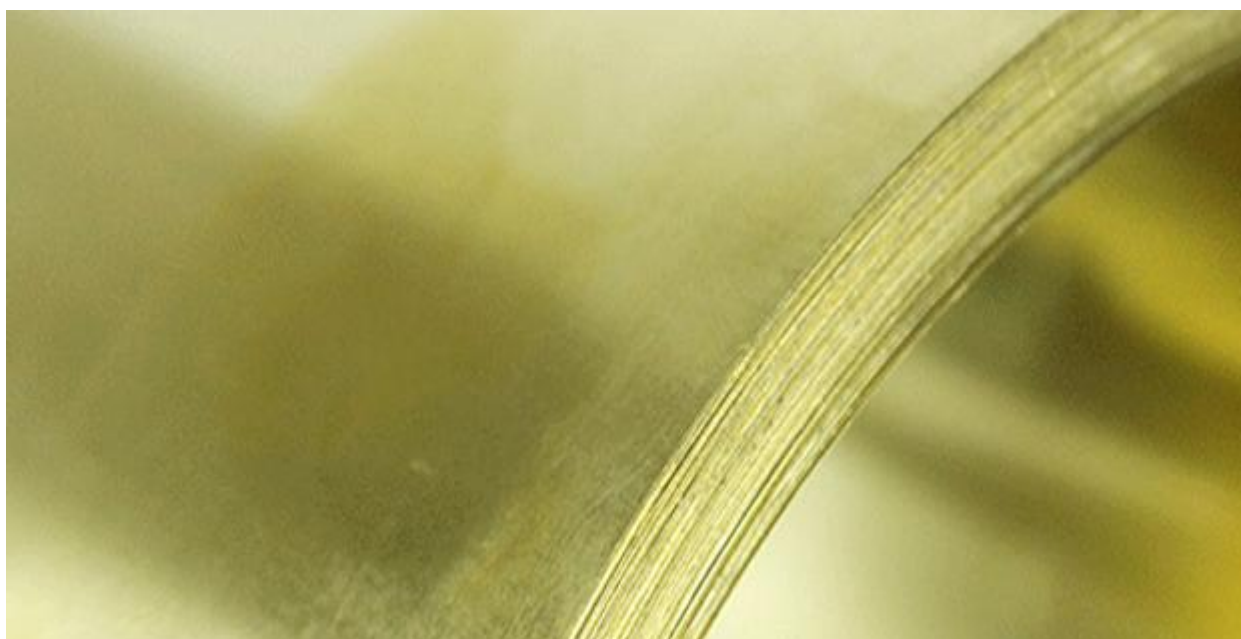

2. Grade and temper for C26800 CuZn33 brass strip

Grade: C2680, C26800, CDA268, C268, CZ107, H68, CuZn33

Temper: O, 1/4H, 1/2H, H, EH,SH

3. Chemical composition of C26800 CuZn33 brass strip

Chemical composition

Cu : 65~70

Zn: balance

Pb: ≤0.03

Pb: ≤0.03

P: ≤0.01

Fe: ≤0.10

Sb : ≤0.005

Bi: ≤0.005

impurity: ≤0.3

4. Characteristic of C26800 CuZn33 brass strip

- Good Machinability
- Easy Welding
- Good Corrosion Resistant
- Good Plasticity
- High Strength

5. Mechanical properties for C26800 CuZn33 brass strip

MECHANICAL PROPERTIES

		Tensile Strength	Yield Offset	Elongation	Hardness
		<i>x 1000 P.S.I.</i>	<i>0.2% offset x 1000 P.S.I.</i>	<i>% in 2 Inches</i>	<i>.020 Gauge and Above</i>
M20	Ann	41 - 61	23 Nom.	50 - 52	-
H01	1/4H	49 - 59	34 Nom.	40 Nom.	B 40 - 65
H02	1/2H	55 - 65	44 Nom.	25 Nom.	B 57 - 74
H03	3/4H	62 - 72	53 Nom.	17 Nom.	B 70 - 80
H04	Hard	68 - 78	57 Nom.	8 Nom.	B 76 - 84
H06	Ex-H	79 - 89	67 Nom.	4 Nom.	B 83 - 89
H08	Spring	86 - 95	71 Nom.	2 Nom.	B 87 - 92
H10	Ex-Spring	90 - 99	75 Nom.	-	B 88 - 93

6. Application of C26800 CuZn33 brass strip

C2680 H68, CuZn33 brass is used for complex cold stamping and deep drawing parts, such as radiator shell, shell pipe, corrugated pipe, and gasket. etc.

7. Manufacture plant of C26800 CuZn33 brass strip



8. Tests and inspection for C26800 CuZn33 brass strip

Test instrument : Metallographic Microscope; Digital Light Processor; Strength Tester; Hardness Tester.



9. Mill certificate for C26800 CuZn33 brass strip




Test Report

No. NGBEC1806779541

Date: 03 Jan 2019

Sample photo:

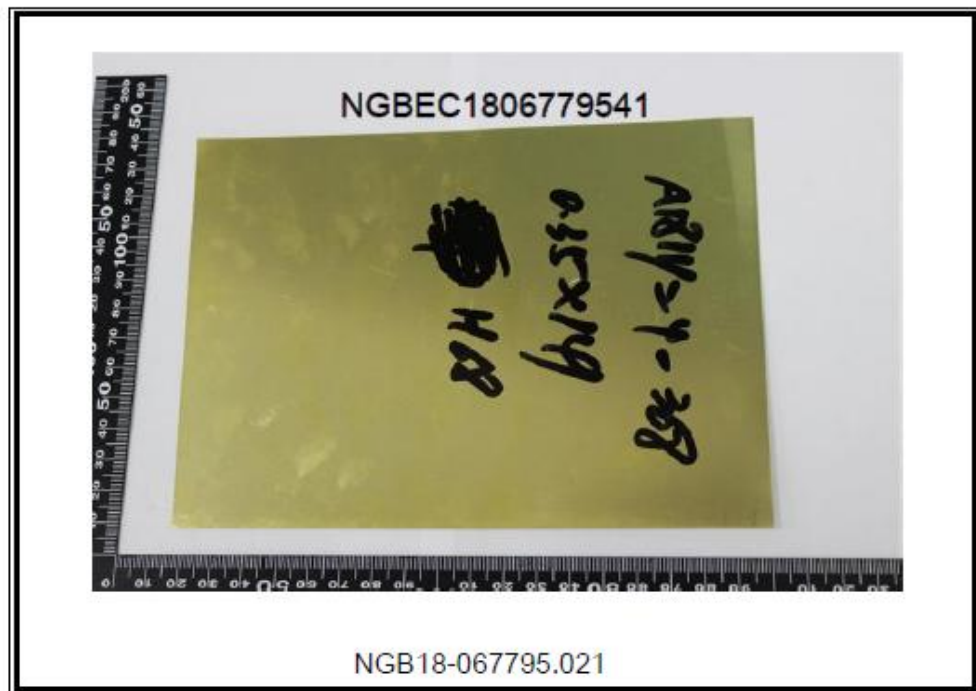


SGS authenticate the photo on original report only

*** End of Report ***

10. Packing and shipping for C26800 CuZn33 brass strip

Packing:

First wrapped by anti-rust paper, second wrapped by plastic film, then packed by wooden box or wooden pallet ..

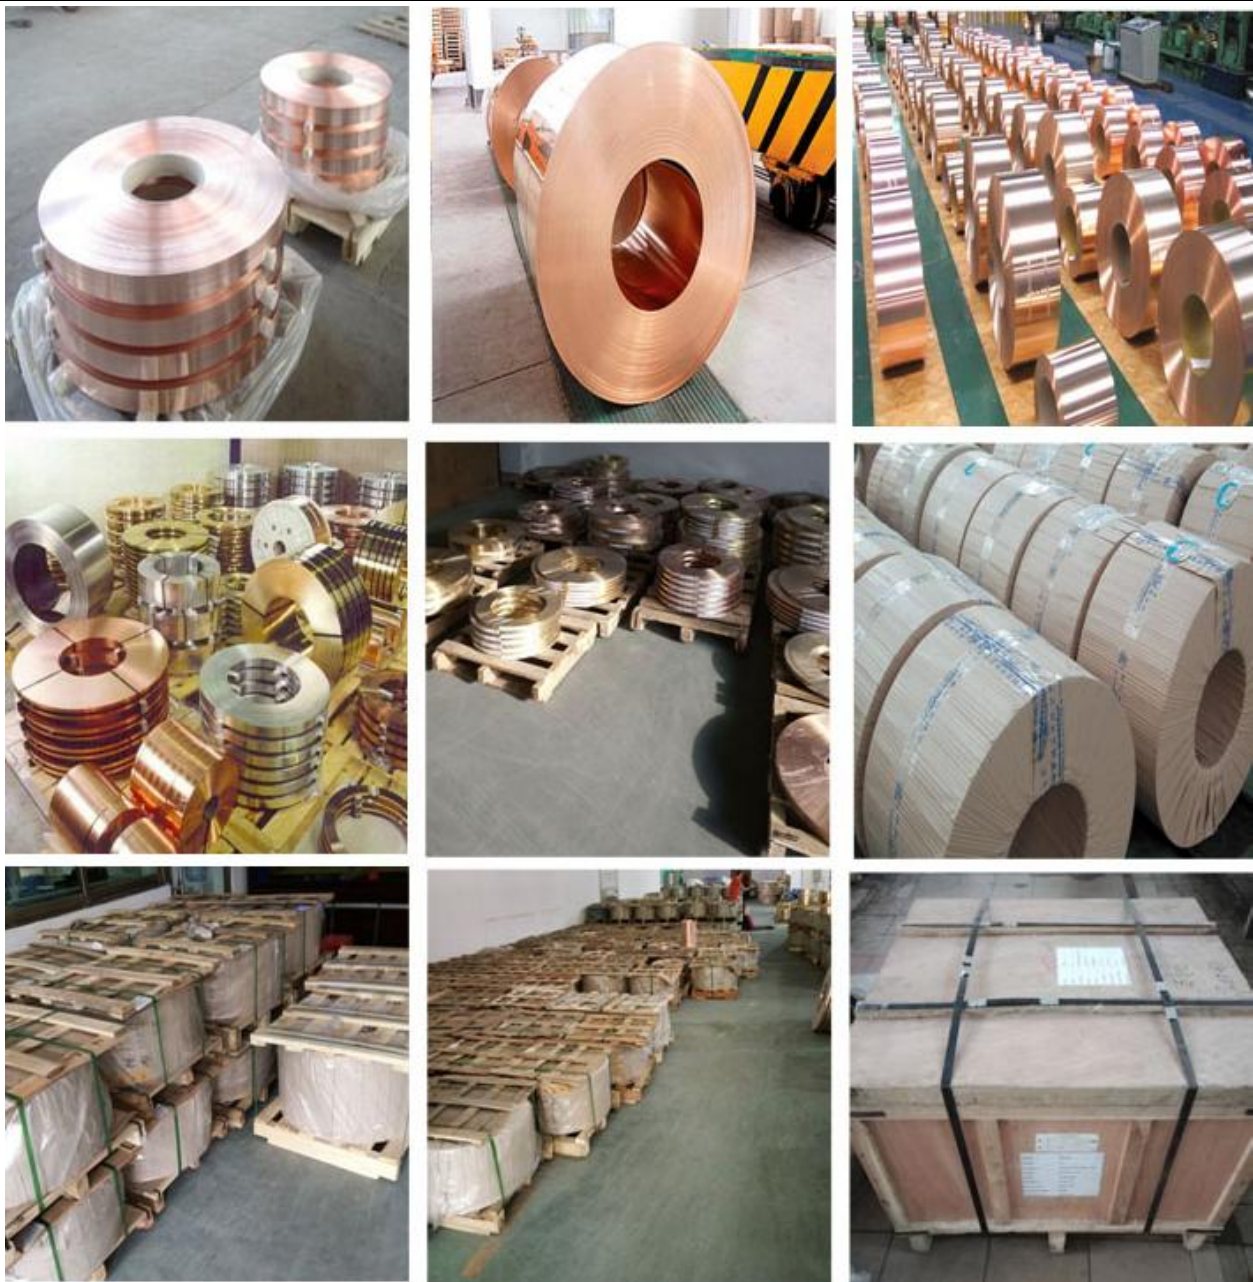

Shipping:

We will choose the best way according to customer's requests.

1. By Air, to the indicated airport.
2. By Express (FedEx, UPS, DHL, TNT, EMS), to the indicated address.
2. By Sea, to the indicated sea port.



11. Questions and Answers

a1. Do you have ISO certificate?

Yes, we obtained ISO9001

a2. How long is your delivery time for C26800 CuZn33 brass strip?

If the master coil is available, 3-7 days do slitting will be ready, if not, will need 20-25 days for new production.

a3. Can you help us to choose suitable material?

Yes, we can recommend the most suitable material according to your application.

a4. How do you control quality?

We produce strictly according to customer's drawings and requests, here are strict control plan in every process, full check of each parts, strive to provide customer 100% quality products, ROHS/SGS test report, material certificate are available.

a5. Do you provide sample? Free or charge?

Yes, if the sample in stock available, free of charge, if not, need to charge some mfg cost.